



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL 2004 16-LAPV-01-145-M (S/N 1HTTXAHR54J021179)

Component
CUMMINS 7600 Front Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (38 LTR)



PRODUIT : ZP-700 ADDITIF MOTEUR - Cas d'étude #01-a / 1de3

RECOMMENDATION

Texte & Soulignement en bleu par Adrenalube

Resample at the next service interval to monitor.

Commentaires :

History2 : Oil age / Age de l'huile (ajout 2 L / ZP-700. Ce camion, en service urbain (beaucoup de ralenti). L'été - travaux routiers - avec boîte d'asphalte. L'hiver - déneigement - avec 2 grattes & épandeur d'abrasifs.

Routine de changement d'huile établi à 2 x / année.

WEAR

Metal levels are typical for a new component breaking in.

History1 & Current : Légère hausse des métaux d'usure dues à l'effet nettoyant du traitement.

NOTE: Dès le premier traitement, l'action de nettoyage du ZP-700 favorise une hausse temporaire du niveaux des débris d'usure.

CONTAMINATION

There is no indication of any contamination in the oil.

History1 - Current :

La contamination externe est acceptable. Les taux d'usure sont acceptables. Les concentrations des métaux d'usure sont acceptables. Légère hausse due à l'effet nettoyant du traitement.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.









L'état de l'huile est acceptable.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number				WC990734	WC972847	WC972842
Sample Date				20 Jun 2017	20 Feb 2017	14 Nov 2016
Machine Age	kms			98584	96794	92
Oil Age	kms			9787	7997	3528
Filter Age	kms			9787	7997	3528
Oil Changed				Not Changd	Not Changd	Not Changd
Filter Changed				Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185	>90	22	21	11
Chromium	ppm	ASTM D5185	>20	0.4	0.5	0.3
Manganese	ppm	ASTM D5185		0.4	0.4	0.2
Nickel	ppm	ASTM D5185	>2	0.0	0.0	0.0
Titanium	ppm	ASTM D5185	>2	0.0	0.0	0.0
Silver	ppm	ASTM D5185	>2	0.0	0.0	0.0
Aluminum	ppm	ASTM D5185	>20	1.8	1.8	1.7
Lead	ppm	ASTM D5185	>40	3.0	3.3	2.0
Copper	ppm	ASTM D5185	>330	2.4	2.9	1.9
Tin	ppm	ASTM D5185	>15	0.7	0.7	0.3
Vanadium	ppm	ASTM D5185		0.0	0.0	0.0

Silicon	ppm	ASTM D5185	>25	3.8	4.4	3.8
Potassium	ppm	ASTM D5185	>20	0.8	0.5	0.8
Fuel		ASTM D3524	>3.0	<1.0	<1.0	<1.0
Glycol		ASTM D2982		NEG	NEG	NEG
Soot %	%	ASTM D7686	>6	0.2	0.2	0.1
Nitration (PA)	%	ASTM D7624	>100	73	71	63
Sulfation (PA)	%	ASTM D7415	>100	62	61	54
Emulsified Water	scalar	Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185		5.2	5.6	3.7
Boron	ppm	ASTM D5185	250	2.5	2.7	1.9
Barium	ppm	ASTM D5185	10	0.1	0.1	0.1
Molybdenum	ppm	ASTM D5185	100	80	92	34
Magnesium	ppm	ASTM D5185	450	672	698	682
Calcium	ppm	ASTM D5185	3000	1348	1408	1260
Phosphorus	ppm	ASTM D5185	1150	981	1012	935
Zinc	ppm	ASTM D5185	1350	1210	1260	1143
Sulfur	ppm	ASTM D5185	4250	2852	2938	2681
Oxidation (PA)	%	ASTM D7414	>100	59	59	52
Visc @ 100°C	cSt	ASTM D7279	14.4	13.2	13.0	13.3

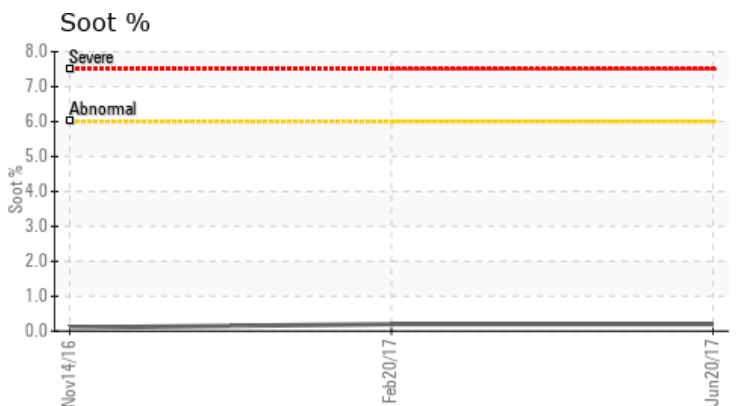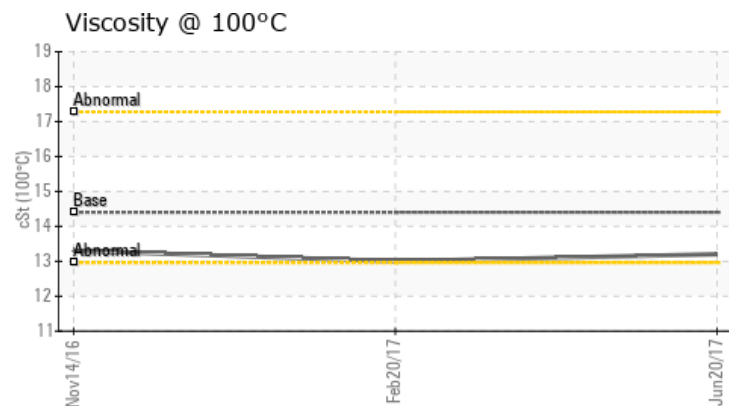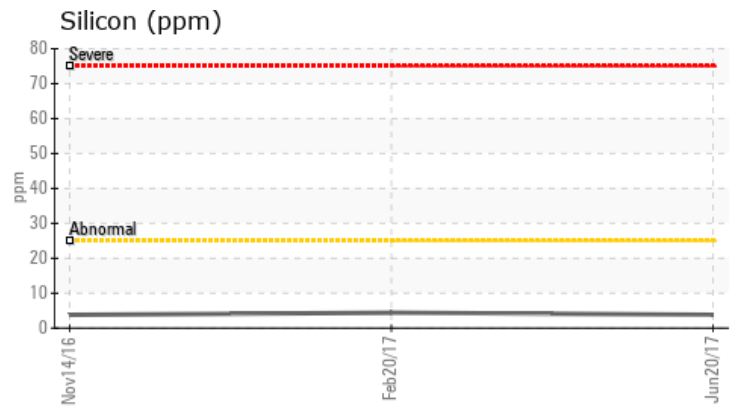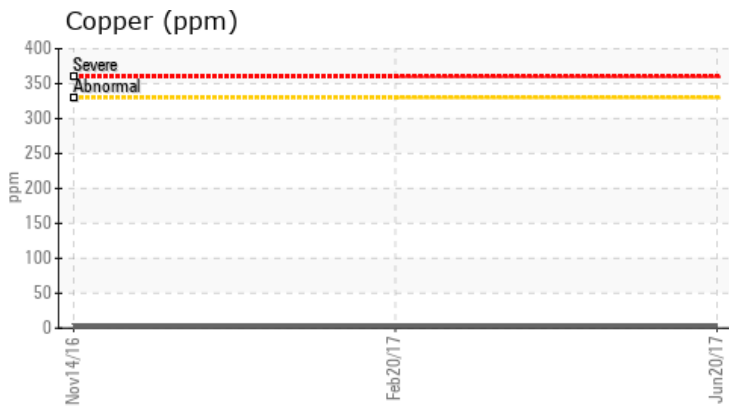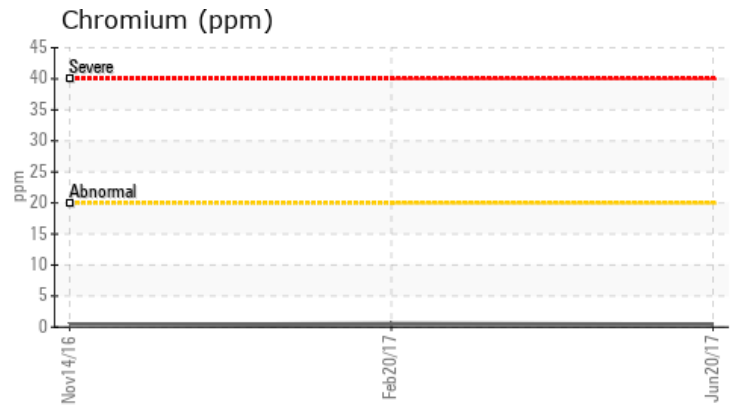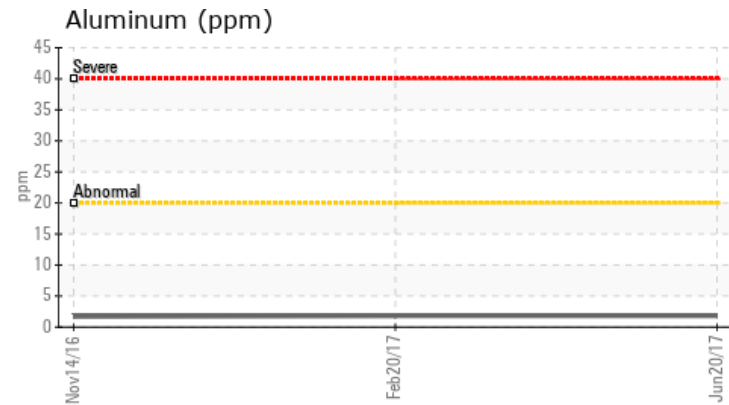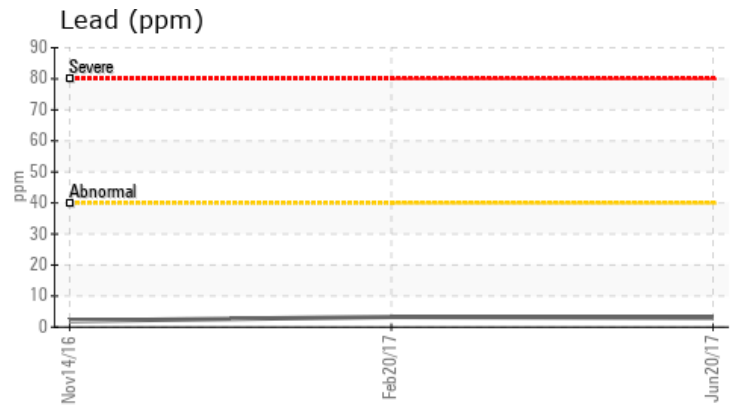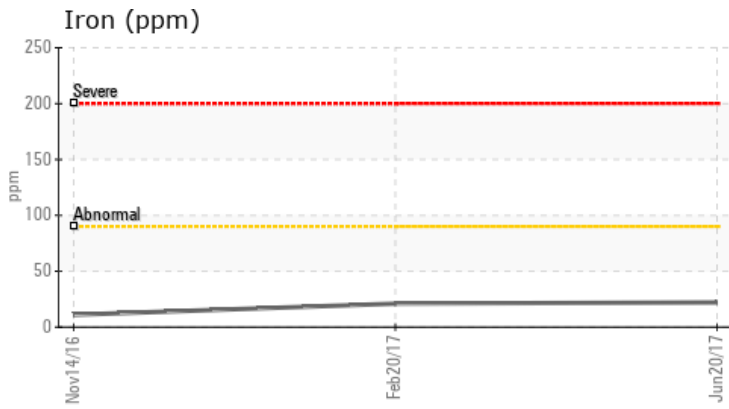

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC990734 **Received** : 26 Jun 2017
Lab Number : 02153920 **Diagnosed** : 02 Apr 2018
Unique Number : 4524881 **Diagnostician** : Wes Davis
Test Package : MOB 1

9042628 Canada Inc
 3755 - E Boul Matte
 Brossard, QC
 Canada J4Y 2P4
 Contact: Pierre Beauchamp
 support-tech@adrenalube.com
 T: (514)999-5546
 F:

To discuss diagnosis or test data, contact Technical Support at 1-800-268-2131.
 To change component or sample information, contact Customer Service at 1-800-268-2131.